

Contents lists available at [ScienceDirect](https://www.sciencedirect.com)

## Discrete Applied Mathematics

journal homepage: [www.elsevier.com/locate/dam](https://www.elsevier.com/locate/dam)

## Charging station optimization for balanced electric car sharing

Antoine Deza<sup>a</sup>, Kai Huang<sup>b</sup>, Michael R. Metel<sup>c,\*</sup><sup>a</sup> Advanced Optimization Laboratory, Department of Computing and Software, McMaster University, Hamilton, ON, Canada<sup>b</sup> DeGroote School of Business, McMaster University, Hamilton, ON, Canada<sup>c</sup> RIKEN AIP, Continuous Optimization Team, Tokyo, Japan

## ARTICLE INFO

## Article history:

Received 28 November 2018

Received in revised form 10 October 2019

Accepted 30 January 2020

Available online xxxx

## Keywords:

Electric vehicle

One-way car sharing

Column generation

Mixed-integer linear programming

## ABSTRACT

This work focuses on finding optimal locations for charging stations for one-way electric car sharing programs. The relocation of vehicles by a service staff is generally required in vehicle sharing programs in order to correct imbalances in the network. We seek to limit the need for vehicle relocation by strategically locating charging stations given estimates of traffic flow. A mixed-integer linear programming formulation is presented with a large number of potential charging station locations. A column generation approach is used which finds an optimal set of locations for the continuous relaxation of our problem. Results of a numerical experiment using real traffic and geographic information system location data show that our formulation significantly increases the balanced flow across the network, while our column generation technique was found to produce a superior solution in much shorter computation time compared to solving the original formulation with all possible station locations.

© 2020 Elsevier B.V. All rights reserved.

## 1. Introduction

Electric car sharing programs are a method for urban centres to combat traffic congestion and pollution [4,5] as well as to promote the use of green technologies. In one-way electric car sharing programs such as Autolib' [1] in Paris, France, users are able to use and return vehicles to any charging station in the network. Large imbalances with the supply of vehicles and parking spaces across nodes in the network are generally observed, requiring a service staff to continuously transport vehicles to satisfy demand.

The problem of determining the optimal locations of charging stations for electric car sharing systems is considered in [5]. The number of stations and vehicles, and their optimal placement is determined in order to maximize profit. One assumption is that decision makers do not consider operational activities of a service staff, and in particular for vehicle relocation, but cars must still be placed at stations at the beginning of the optimization time horizon. In the scenario where an electric car sharing network has already been built, a number of researchers have developed methodologies for the vehicle relocation problem. The use of folding bicycles by workers which fit into the trunks of cars [6], and the use of two trucks which are capable of moving a number of vehicles at a time [7] have been proposed. In [2], a set of agents are assumed to be employed which drive vehicles between stations. Given a set of predetermined trips, the number of vehicles, agents, and the schedule of the agents are optimized each day. In addition, the optimal relocation of workers themselves across the network in order to relocate vehicles has been considered in [4].

The idea of having to relocate vehicles within the network runs counter to the objective of decreasing traffic congestion. The inefficiency of transporting vehicles between stations is compounded for electric vehicles, as not only are they not being used productively while being transported, but will require further charging afterwards if driven by workers between stations.

\* Corresponding author.

E-mail address: [michaelros.metel@riken.jp](mailto:michaelros.metel@riken.jp) (M.R. Metel).

In this work we consider a set of nodes with an expected traffic flow between each pair of nodes per time period. A methodology is presented to place charging stations in such a way so as to limit supply imbalances in the network by matching demand for vehicles and parking spaces at each charging station. By a strategic placement of charging stations, the need for a service staff to continuously relocate vehicles is greatly reduced, which is shown by a significant increase in the estimated balanced flow across all charging stations.

The remainder of the paper is organized as follows. In Section 2 we describe the problem setting, the concept of a balanced electric car sharing network, and its corresponding optimization problem (OP). Section 3 is where the balanced charging station algorithm (BCSA) is developed using a column generation technique to find a near optimal set of charging stations. Section 4 outlines how to solve (OP) by exhaustively enumerating all possible charging stations which is used for comparison with BCSA. In Section 5 we describe the numerical experiment with the use of real traffic and geographic information system location data, and present the results. The paper finishes in Section 6 with the conclusion.

## 2. Balanced electric car sharing optimization model

Let  $N$  be the set of trip nodes, which is the set of locations where trips are arriving to and departing from, and let  $T = \{1, 2, \dots, M_T\}$  be a set of time intervals over a 24 h cycle with lengths  $L_t$ . For each  $t \in T$  there exists an origin–destination matrix  $OD^t \in \mathbb{Z}^{|N| \times |N|}$ , indicating for each pair of nodes  $\{n, n'\} \in N$ , an estimate of the number of trips from  $n$  to  $n'$ . For each node  $n \in N$ , its outward flow over  $t$  is  $f_n^{t-} = \sum_{n' \in N} OD_{n,n'}^t$ , which is the sum of trips departing from node  $n$ , requiring an electric vehicle near  $n$ . Its inward flow over  $t$  is  $f_n^{t+} = \sum_{n' \in N} OD_{n',n}^t$ , which is the sum of trips arriving to node  $n$ , requiring a parking space near  $n$ .

Let  $S$  be the set of potential charging stations. We assume that people are willing to walk up to  $w = 0.5$  km to or from a charging station as used in [2,6]. For each  $s \in S$  we define its set of neighbouring nodes as a subset of nodes which are within walking distance from it,  $\mathcal{N}(s) \subseteq \{n \in N : d(n, s) \leq w\}$ , where  $d(n, s)$  is the distance in kilometres between  $n$  and  $s$ . Likewise, we define the neighbouring set of stations for each  $n \in N$  as a subset  $\mathcal{N}(n) \subseteq \{s \in S : d(s, n) \leq w\}$ . In addition,  $n \in \mathcal{N}(s)$  if and only if  $s \in \mathcal{N}(n)$ . We assume all distances are calculated using the  $l_1$ -norm.

We must decide how many parking spaces to place at each charging station. As will be described in more detail, we require a balanced flow at each station, meaning the number of trip arrivals and departures assigned to a station each time period are always equal. Given this requirement, we assume that cars will be arriving and departing with probability 0.5, and always choose an even number of parking spaces at each charging station, with the intention of having half the number of vehicles as spaces to best meet incoming demand. This is in line with what is observed in current use, with 2 and 4 parking spaces being the most common for a charging station [8].

In order to determine the usage capacity of a pair of parking spaces, we need an estimate of how long it will take for someone to park and plug in a vehicle, and to register a vehicle and leave the station. Let  $p_a$  and  $p_d$  be the times to perform these two tasks in hours, respectively. As will be clear, these individual estimates are not required, but only their average  $p = \frac{1}{2}(p_a + p_d)$ . We also need an estimate of the average trip length, from which we can estimate the average charging time required after each trip. For each time period  $t$ , we calculate  $l_t$ , the average trip length over the network,

$$l_t = \frac{\sum_{n \in N} \sum_{n' \in N} OD_{n,n'}^t d(n, n')}{\sum_{n \in N} \sum_{n' \in N} OD_{n,n'}^t}.$$

Given an estimate of the electric vehicle's charging time per kilometre driven,  $u$  in hours/km, we can estimate the average charging time required after each trip,  $a_t = ul_t$ . The amount of time on average required between trips for a car to be dropped off and recharged, or picked up is then  $p + \frac{a_t}{2}$ . We note that this average time is valid as the number of assigned arrivals and departures at each station are always equal. Assuming that  $OD$  contains an estimate of the total traffic flow within a city, we assume that  $k = 0.5\%$  of the flow will eventually be fulfilled using our service as in [6]. The maximum amount of flow a pair of parking spaces at station  $s$  can be allocated during time period  $t \in T$  is then estimated as

$$v_t = 2 \left\lfloor \frac{L_t}{k(p + \frac{a_t}{2})} \right\rfloor$$

where the estimated capacity of a single parking space,  $L_t/(k(p + a_t/2))$ , has been rounded down to the nearest integer to determine the maximum number of whole trips. We note that  $v_t$  is an even integer, which results in integral solutions of our optimization problem (OP), as proven in Property 1.

Whereas the objective of a company running a combustion engine car sharing program is most likely to be to maximize profit, in this work we assume that the electric car sharing program is funded or heavily subsidized by a government in order to reduce pollution and road congestion, and to promote green technologies. For this reason, the objective in our optimization problem (OP) is to maximize the number of electric vehicle trips, written equivalently as minimizing the number of trips not satisfied. In the literature, our objective is most similar to that of [2,4], which both used multi-objective models, minimizing costs and unsatisfied customers. We as well minimize the number of unsatisfied customers, but place costs in a budget constraint.

The flow to and from each node is assigned to its neighbouring stations.  $F^{t-} \in \mathbb{R}_+^{|S| \times |N|}$  is the decision matrix of the number of trips from each node  $n$  assigned to leave from each station  $s$  during time period  $t$ , and likewise  $F^{t+} \in \mathbb{R}_+^{|S| \times |N|}$  is the decision matrix of the number of trips to each node  $n$  assigned to arrive at each station  $s$  during time period  $t$ . Further,  $E^t \in \mathbb{R}_+^{|N| \times |N|}$  is the traffic flow in  $OD^t$  which is not satisfied by any station, and  $e$  is a vector of ones of size  $|N|$ . We assign the inward flow of nodes to their neighbouring stations by constraint set (OP.2), and their outward flow by

(OP.3). Care must be taken to maintain the integrity of each trip, meaning if an incoming trip to node  $n$  is not assigned to a charging station, then a corresponding trip leaving from a node  $n'$  to  $n$  cannot be assigned to a station's outward flow. If an inward trip to node  $n$  is not satisfied in time  $t$ , then an entry  $n'$  of the  $n$ th column of  $E^t$  is incremented by 1 in (OP.2). This then forces one corresponding outward trip from  $n'$  to not be satisfied in (OP.3). This is enforced by constraint (OP.5), which ensures that the entry in  $E^t$  corresponds to an actual trip in OD. A small example showing the necessity of constraint (OP.5) is found in the Appendix subsection titled "Requirement of (OP.5) in (OP) for trip integrity".

The decision variable  $z_s$  determines the number of pairs of parking spaces to install at station  $s$ ,  $m_s$  is the maximum number of pairs of parking spaces that can be installed, and  $c_s$  is the cost of constructing a pair of parking spaces. We assume all costs, including the electric vehicles themselves are embedded into the price per pair of parking spaces.  $b$  is the budget allocated for the construction of the electric car sharing network. Constraint set (OP.4) enforces the net flow over each station to be zero, so as to minimize network imbalances and the need for vehicle relocation, as the expected number of cars parking and leaving from each charging station over each time period are equal. We have also included the corresponding dual variables to the left of each set of constraints.

$$\begin{aligned}
 & \min \sum_{t \in T} \sum_{n, n' \in N} E_{n, n'}^t & (OP) \\
 (U_{t,s} \geq 0) \quad & \text{s.t.} \quad \sum_{n \in \mathcal{N}(s)} (F_{s,n}^{t+} + F_{s,n}^{t-}) \leq v_t z_s \quad \forall t \in T, s \in S & (OP.1) \\
 (P_{t,n}) \quad & \sum_{s \in \mathcal{N}(n)} F_{s,n}^{t+} + (E_{\cdot, n}^t)^T e = f_n^{t+} \quad \forall t \in T, n \in N & (OP.2) \\
 (G_{t,n}) \quad & \sum_{s \in \mathcal{N}(n)} F_{s,n}^{t-} + E_{n, \cdot}^t e = f_n^{t-} \quad \forall t \in T, n \in N & (OP.3) \\
 (R_{t,s}) \quad & \sum_{n \in \mathcal{N}(s)} (F_{s,n}^{t+} - F_{s,n}^{t-}) = 0 \quad \forall t \in T, s \in S & (OP.4) \\
 (W_{n,n}^t \geq 0) \quad & E \leq OD & (OP.5) \\
 (q \geq 0) \quad & \sum_{s \in S} c_s z_s \leq b \\
 (h_s \geq 0) \quad & z_s \leq m_s \quad \forall s \in S \\
 & F^{t+} \in \mathbb{R}_+^{|\mathcal{S}| \times |N|}, F^{t-} \in \mathbb{R}_+^{|\mathcal{S}| \times |N|}, E^t \in \mathbb{R}_+^{|N| \times |N|} \\
 & z \in \mathbb{Z}_+^{|\mathcal{S}|}
 \end{aligned}$$

**Property 1.** The optimal solution of (OP) is integral.

**Proof.** Given that  $\sum_{n \in \mathcal{N}(s)} F_{s,n}^{t+} = \sum_{n \in \mathcal{N}(s)} F_{s,n}^{t-} \quad \forall t \in T, s \in S$  from (OP.4), the station capacity constraints (OP.1) can be written equivalently as

$$\sum_{n \in \mathcal{N}(s)} F_{s,n}^{t+} \leq \frac{v_t}{2} z_s \quad \forall t \in T, s \in S \tag{OP.1'}$$

where the right-hand side,  $v_t z_s / 2 \in \mathbb{Z}_+$ . Let  $F_{vec}^{t+}$  be the vector of all columns of  $F^{t+}$  stacked on top of each other, where all elements corresponding to an  $s \notin \mathcal{N}(n) \forall n$  have been removed. Let  $F_{vec}^{t-}$  be built in the same manner, and let  $E_{vec}^t$  simply be the vector of all columns of  $E^t$  stacked on top of each other. We set  $X^t = [F_{vec}^{t+}; F_{vec}^{t-}; E_{vec}^t]$  and can now write constraints [(OP.1'),(OP.2)-(OP.5)] as  $AX^t \{\leq, =\} b^t$ , where  $A$  is a matrix composed of  $\{-1, 0, 1\}$ ,  $b^t$  is a vector composed of integers, and  $\{\leq, =\}$  stands in for  $\leq$  or  $=$  as appropriate for each row. As a reference, we have included a subsection of the Appendix entitled "An example of  $AX^t \{\leq, =\} b^t$ ". To show that  $A$  is totally unimodular we use Property 2 which is borrowed from [10].

**Property 2** ([10, Theorem 19.3]). Let  $A$  be a matrix with entries 0, 1, or  $-1$ .  $A$  is totally unimodular if and only if each collection  $J$  of columns of  $A$  can be split into two parts,  $J_1$  and  $J_2$ , so that the sum of the columns in  $J_1$  minus the sum of the columns  $J_2$  is a vector with entries only equal to 0, 1, or  $-1$ .

As the transpose of a totally unimodular matrix is also totally unimodular, we show that the condition holds for each collection  $J$  of rows of  $A$ . We will assign rows from each constraint set to  $J_1$  or  $J_2$ , and show that for each column the difference of the sums has magnitude 1 or 0.

We partition the columns of  $A$  into three subsets  $\{C_1, C_2, C_3\}$  by which variables they multiply. Let  $C_1$  be the first  $\sum_{n \in N} |\mathcal{N}(n)|$  columns multiplying  $F_{vec}^{t+}$ , let  $C_2$  be the second  $\sum_{n \in N} |\mathcal{N}(n)|$  columns multiplying  $F_{vec}^{t-}$ , and let  $C_3$  be the last  $|N| \times |N|$  columns multiplying  $E_{vec}^t$ .

We begin with  $C_2$ , and note that each variable  $F_{s,n}^{t-}$  will be found in one constraint in (OP.3), with a coefficient of 1 in  $A$ , and in one constraint of (OP.4), with a coefficient of  $-1$ . We therefore place all rows from (OP.3) and (OP.4) into  $J_2$ . The sum of each column over  $C_2$  will then be either 0, 1, or  $-1$ . The current partitioning is  $J_1 = \{\emptyset\}$  and  $J_2 = \{(OP.3), (OP.4)\}$ .

For  $C_3$  each variable  $E_{n,n'}^t$  is found in one constraint in (OP.2), (OP.3), and (OP.5), all with a coefficient of 1 in  $A$ . As rows from (OP.3) are in  $J_2$ , we place all rows from (OP.2) in  $J_1$ . We note that rows from (OP.5) always contain only one non-zero element equal to 1: They are zero over  $C_1$  and  $C_2$ , and form an identity matrix in  $C_3$ . This implies that their placement in  $J_1$  or  $J_2$  only affects the sums of columns in  $C_3$ . Any row  $i$  in (OP.5) with 1 in column  $j$  can then be placed in either  $J_1$  or  $J_2$  to ensure that column  $j$  sums to 0,  $-1$ , or 1: If the rows from (OP.2) and (OP.3) with 1 in column  $j$  are in  $J$ , or neither are in  $J$ , then  $i$  can be placed in  $J_1$  or  $J_2$ . If only the row from (OP.2) is in  $J$ , then place  $i$  in  $J_2$ , and if only the row from (OP.3) is in  $J$ , place  $i$  in  $J_1$ . The current partitioning is  $J_1 = \{(OP.2), (OP.5)_1\}$  and  $J_2 = \{(OP.3), (OP.4), (OP.5)_2\}$ , where (OP.5) is partitioned as described.

For  $C_1$  each variable  $F_{s,n}^{t+}$  is found in one constraint in (OP.1'), (OP.2), and (OP.4), all with a coefficient of 1. We have already placed rows from (OP.2) in  $J_1$  and rows from (OP.4) in  $J_2$ . Given that constraints (OP.1') and (OP.4) both contain the same summation of  $F^{t+}$  over all  $t$  and  $s$ , the rows of  $A$  corresponding to (OP.1') and (OP.4) are identical over  $C_1$ , meaning that for each row of (OP.1') there is a copy in the rows of (OP.4), in  $C_1$ . In addition, the rows of (OP.1') only multiply variables from  $F_{vec}^{t+}$ , meaning their placement in either  $J_1$  or  $J_2$  only affect the sums of columns of  $C_1$ . We can therefore place rows from (OP.1') in  $J_1$  or  $J_2$  so that each column of  $C_1$  sums to 0, 1, or  $-1$  as done previously with rows of (OP.5) for  $C_2$ . The final partitioning is  $J_1 = \{(OP.1')_1, (OP.2), (OP.5)_1\}$  and  $J_2 = \{(OP.1')_2, (OP.3), (OP.4), (OP.5)_2\}$ .

**Property 1** would not hold in general without the fact that  $v_t$  is even for all  $t$ , as can be observed in the following scenario. For an optimal solution where  $v_t$  is odd for a constraint in (OP.1) which is binding, half of an inflow of a trip and half of an outflow of a trip would have to be assigned to  $s$ , as  $\sum_{n \in \mathcal{N}(s)} F_{s,n}^{t+}$  and  $\sum_{n \in \mathcal{N}(s)} F_{s,n}^{t-}$  are equal, but sum to an odd number.

An undetermined aspect of (OP) is the set of stations  $S$ . If we were to consider every location in the city it would be difficult to bound its size. We limit our set of potential stations to one per feasible subset of nodes, so that  $|N| \leq |S| \leq 2^{|N|} - 1$ , where the lower bound occurs when  $d(n, n') > 2w$  and the upper bound occurs when  $d(n, n') \leq 2w$  for all  $n, n' \in N$ . Although we do not expect  $|S|$  to be near its upper bound, its size has the potential to make (OP) a computationally challenging problem, particularly when implemented in dense urban areas with many nodes. For this reason, we propose a column generation approach outlined in the next section.

### 3. Determining S using column generation

We begin with some initial set of stations  $S'$  and iteratively add stations using a column generation technique until we have found an optimal set of stations for the continuous relaxation of (OP), and use this set to find a solution to (OP). The dual program (D) of the continuous relaxation of (OP) will be used in the solution technique.

$$\max -bq - \sum_{s \in S} m_s h_s - \sum_{t \in T} \sum_{n, n' \in N} OD_{n,n'}^t W_{n,n'}^t - \sum_{t \in T} \sum_{n \in N} (f_n^{t+} P_{t,n} + f_n^{t-} G_{t,n}) \tag{D}$$

$$\text{s.t. } 1 + G_{t,n} + P_{t,n'} + W_{n,n'}^t \geq 0 \quad \forall t \in T, n, n' \in N \tag{D.1}$$

$$U_{t,s} + P_{t,n} + R_{t,s} \geq 0 \quad \forall t \in T, s \in S, n \in \mathcal{N}(s) \tag{D.2}$$

$$U_{t,s} + G_{t,n} - R_{t,s} \geq 0 \quad \forall t \in T, s \in S, n \in \mathcal{N}(s) \tag{D.3}$$

$$h_s + qc_s - \sum_{t \in T} v_t U_{t,s} \geq 0 \quad \forall s \in S \tag{D.4}$$

$$U \in \mathbb{R}_+^{M_T \times |S|}, \quad W \in \mathbb{R}_+^{T \times |N| \times |N|}, \quad h \in \mathbb{R}_+^{|S|}, \quad q \geq 0$$

#### 3.1. Finding a new station

The feasibility problem *Finding a Station (FS)* is a set of constraints that a new station  $s'$  to include in  $S'$  is required to satisfy.

$$B_{s',s'}^T B_{s,s'} + (e - B_{s,s})^T (e - B_{s,s'}) \leq |N| - 1 \quad \text{for } s \in S' \tag{FS.1}$$

$$d(s', n) \leq w + (e - B_{n,s'}) (d_n - w) \quad \text{for } n \in N \tag{FS.2}$$

$$s'_x = \alpha^T x, \quad s'_y = \alpha^T y \tag{FS.3}$$

$$\alpha^T e = 1, \quad \alpha \leq B_{s,s'} \tag{FS.4}$$

$$c_{s'} = \alpha^T c^N \tag{FS.5}$$

$$\alpha^T m^N - 0.5 \leq m_{s'} \leq \alpha^T m^N + 0.5 \tag{FS.6}$$

$$\alpha \in \mathbb{R}_+^{|N|}, \quad B_{n,s'} \in \{0, 1\}^{|N|}, \quad c_{s'} \in \mathbb{R}_{++}, \quad m_{s'} \in \mathbb{Z}_{++}$$

The neighbourhoods of all current stations are encoded in a matrix  $B \in \{0, 1\}^{|N| \times |S'|}$ , where  $B_{\cdot, s}$  represents  $\mathcal{N}(s)$ . A new column will be added for  $s'$ , with constraint set (FS.1) ensuring its uniqueness. We define  $d_n$  as the maximum feasible distance of a station from  $n$ , which equals  $d_n = \max_{n' \in N} d(n, n')$ . This is used as a big-M constant when ensuring each  $n \in \mathcal{N}(s')$  is within  $w$  of  $s'$  in constraint set (FS.2). Each node  $n$  has coordinates  $x_n$  and  $y_n$ , stored in vectors  $x \in \mathbb{R}^{|N|}$  and  $y \in \mathbb{R}^{|N|}$ . Let  $s'_x$  and  $s'_y$  be the coordinates of  $s'$ , which we write as a convex combination of the coordinates of its neighbouring nodes using constraints (FS.3) and (FS.4). This enables us to infer the cost of installing a pair of parking spaces at  $s'$ , and its parking space capacity. Each node  $n$  has an estimated cost  $c_n^N$  for constructing a pair of parking spaces at  $n$ , as well as a capacity of pairs of parking spaces  $m_n^N$ . We estimate the price  $c_{s'}$  and the capacity  $m_{s'}$  of  $s'$  using the weighted average of the nodes' values within  $\mathcal{N}(s')$  in constraints (FS.5) and (FS.6). Constraint (FS.6) sets  $m_{s'}$  to the rounded value of  $\alpha^T m^N$ .

After solving the dual program (D) for some set  $S'$ , we seek to find a feasible station satisfying (FS) which could result in a decrease in the objective of (D). The dual objective will decrease if  $h_{s'} > 0$ , or equivalently if  $\sum_{t \in T} v_t U_{t, s'} - q c_{s'} > 0$  from constraint (D.4). From constraint sets (D.2) and (D.3), it follows that  $U_{t, s'} \geq -\frac{(P_{t, n} + G_{t, n'})}{2}$  for all  $n, n' \in \mathcal{N}(s')$  and this inequality will be binding for some  $n, n' \in \mathcal{N}(s')$  or  $U_{t, s'}$  will be equal to 0. We build the matrices  $PG^t \in \mathbb{R}_+^{|N| \times |N|}$ , where  $PG_{n, n'}^t = \max\left(-\frac{(P_{t, n} + G_{t, n'})}{2}, 0\right)$ . The optimal value of  $U_{t, s'}$  in (D) will be the maximum value of  $PG^t$  over  $n, n' \in \mathcal{N}(s')$ .

We can determine the optimal values of  $U_{\cdot, s'}$  for a new potential station  $s'$ , given  $B_{\cdot, s'}$  and holding all current dual variables constant, using the following linear program, *Determining U (DU)*, where  $PG^t \circ D^t$  is the Hadamard product.

$$\begin{aligned} & \max \sum_{t \in T} U_{t, s'} & (DU) \\ \text{s.t. } & U_{t, s'} = \sum_{n \in N} \sum_{n' \in N} (PG^t \circ D^t)_{n, n'} \quad \text{for } t \in T \\ & e^T D^t e = 1 \quad \text{for } t \in T \\ & D_{n, n'}^t \leq B_{n, s'} \quad \text{for } t \in T, n, n' \in N \\ & D_{n, n'}^t \leq B_{n', s'} \quad \text{for } t \in T, n, n' \in N \\ & D \in \mathbb{R}_+^{|N| \times |N| \times M_T} \end{aligned}$$

We find the next charging station  $s'$  to include in (OP) by solving the following mixed-integer linear program, *New Station (NS)*, where (FS) is combined with (DU), but for maximizing  $h_{s'}$  instead of  $\sum_{t \in T} U_{t, s'}$ . If  $h_{s'} > 0$ , we have found a station vector  $B_{\cdot, s'}$  which could improve the optimal solution of (OP).

$$\begin{aligned} & \max h_{s'} = \sum_{t \in T} v_t U_{t, s'} - q c_{s'} & (NS) \\ \text{s.t. } & U_{t, s'} = \sum_{n \in N} \sum_{n' \in N} (PG^t \circ D^t)_{n, n'} \quad \text{for } t \in T \\ & e^T D^t e = 1 \quad \text{for } t \in T \\ & D_{n, n'}^t \leq B_{n, s'} \quad \text{for } t \in T, n, n' \in N \\ & D_{n, n'}^t \leq B_{n', s'} \quad \text{for } t \in T, n, n' \in N \\ & d(s', n) \leq w + (e - B_{n, s'}) (d_n - w) \quad \text{for } n \in N \\ & B_{\cdot, s'}^T B_{\cdot, s'} + (e - B_{\cdot, s'})^T (e - B_{\cdot, s'}) \leq N - 1 \quad \text{for } s \in S' \\ & s'_x = \alpha^T x, \quad s'_y = \alpha^T y \\ & \alpha^T e = 1, \quad \alpha \leq B_{\cdot, s'} \\ & c_{s'} = \alpha^T c^N, \quad \alpha \in \mathbb{R}_+^{|N|} \\ & B_{\cdot, s'} \in \{0, 1\}^{|N|}, \quad D \in \mathbb{R}_+^{|N| \times |N| \times M_T} \end{aligned}$$

We did not consider the effect of  $m_{s'}$  in (NS), and so now given our optimal solution for  $B_{\cdot, s'}$  and  $U_{\cdot, s'}$  from (NS), we determine the specific location of the new station  $s'$ . Let  $\bar{f}_{s'}^t := 2 \min(B_{\cdot, s'}^T f^{t-}, B_{\cdot, s'}^T f^{t+})$ , which is the maximum flow that could be allocated to station  $s'$  in time  $t$  if all of its neighbouring nodes allocate all of their trips to  $s'$ . Let  $m_{s'}^c := \max_{t \in T} \left\lceil \frac{\bar{f}_{s'}^t}{v_t} \right\rceil$ , which is the maximum parking space capacity station  $s'$  could require. We now consider the following non-convex mixed-integer program, *Optimize  $\alpha$  (OA)*, to determine the location of  $s'$ . We do not want to reward a location for capacity which cannot be used, so we use  $\min(m_{s'}, m_{s'}^c)$  in the objective.

$$\max \min(m_{s'}, m_{s'}^c) \left( \sum_{t \in T} v_t U_{t, s'} - q c_{s'} \right) \quad (OA)$$

$$\begin{aligned} \text{s.t. } & s'_x = \alpha^T x, \quad s'_y = \alpha^T y \\ & \alpha^T e = 1, \quad \alpha \leq B_{\cdot, s'} \\ & c_{s'} = \alpha^T c^N, \quad m_{s'} \leq \alpha^T m^N + 0.5 \\ & \alpha \in \mathbb{R}_+^{|N|}, \quad m_{s'} \in \mathbb{Z}_{++} \end{aligned}$$

Given the non-convexity in the objective, we solve (OA) as a set of linear programs, (OA<sup>i</sup>),

$$\begin{aligned} \max & m_{s'}^i \left( \sum_{t \in T} v_t U_{t, s'} - q c_{s'} \right) & \text{(OA}^i\text{)} \\ \text{s.t. } & s'_x = \alpha^T x, \quad s'_y = \alpha^T y \\ & \alpha^T e = 1, \quad \alpha \leq B_{\cdot, s'} \\ & c_{s'} = \alpha^T c^N, \quad m_{s'}^i \leq \alpha^T m^N + 0.5 \\ & \alpha \in \mathbb{R}_+^{|N|} \end{aligned}$$

for  $m_{s'}^i \in \mathbb{Z}_{++}$  over the interval

$$m_{s'}^{\min} \leq m_{s'}^i \leq \max(m_{s'}^{\min}, m_{s'}^{\bar{c}}).$$

where  $m_{s'}^{\min} := \min_{n \in \mathcal{N}(s')} m_n$ ,  $m_{s'}^{\bar{c}} := \min(m_{s'}^c, m_{s'}^{\max})$ , and  $m_{s'}^{\max} := \max_{n \in \mathcal{N}(s')} m_n$ . We take the optimal  $\alpha$  vector from the program (OA<sup>i</sup>) with the maximum objective.

### 3.2. Valid inequalities for (NS)

Many instances of (NS) must be solved, which can be time consuming given the binary variables  $B_{\cdot, s'}$ . A set of valid inequalities were added to (NS) which were found to significantly reduce computation time. The general idea is that if we are given a subset of nodes  $N'$  where  $d(n, n') > 2w$  for all  $n, n' \in N'$ , then  $\sum_{n \in N'} B_{n, s'} \leq 1$ . The algorithm for adding these constraints is found in Algorithm 1.

---

#### Algorithm 1 Valid inequalities for (NS)

---

```

1: for  $n \in N$  do
2:    $V = \{n\}$ 
3:   for  $n' \in N$  do
4:     if  $d(y, n') > 2w \forall y \in V$  then
5:        $V = V + \{n'\}$ 
6:     end if
7:   end for
8:   if  $|V| > 1$  then
9:     add  $\sum_{y \in V} B_{y, s'} \leq 1$  to (NS)
10:  end if
11: end for
    
```

---

### 3.3. Column generation search heuristic

We write the location of  $s'$  as a convex combination of nodes as a means of estimating its cost and capacity, but to motivate the proposed heuristic, let us first assume  $s'_x$  and  $s'_y$  are free variables, and the station's cost and capacity are not functions of its neighbouring nodes.

If we consider the problem setting where  $M_T = 1$ , then an optimal solution for the convex relaxation of (OP) can be found consisting of stations of size no greater than 2. This is due to when maximizing the objective of (NS), PG is only a function of two nodes. More intuitively, given a number of nodes all within  $2w$  of each other, it will always be optimal to build a number of fractional stations for each pair of nodes, which gives maximum flexibility of location. Increasing the size of  $M_T$ , a neighbourhood of size  $|\mathcal{N}(s')| \leq 2M_T$  will be optimal, where  $|\mathcal{N}(s')| = 2M_T$  can occur when for each  $t$ , new nodes make up the pair mapping to the maximum of  $PG^t$ .

In our setting, where a station's cost and capacity is a function of its neighbouring nodes, this bound no longer applies as adding extra nodes can decrease station cost and increase capacity. When our technique creates stations with larger neighbourhoods though, it is not for our objective of matching flow from different nodes, but for what can be considered secondary concerns relating to our constraints. In order to ensure stations with larger neighbourhoods are generated so



more balanced flow can be satisfied, in each iteration we add a station with the largest possible neighbourhood which still results in a positive objective value for (NS). To begin, we solve *Maximum Neighbourhood (MN)* to find the largest possible neighbourhood size. We then proceed to solve (NS) with the added constraint  $\sum_{n \in N} B_{n,s'} = \overline{MN}$  which we will refer to as (NS)( $\overline{MN}$ ). The value of  $\overline{MN}$  is then decremented when no more stations can be found which result in  $h_{s'} > 0$ . Details of this process are found in Section 3.5.

$$\begin{aligned} \max \overline{MN} &:= \sum_{n \in N} B_{n,s'} && \text{(MN)} \\ \text{s.t. } d(s', n) &\leq w + (e - B_{n,s'})(d_n - w) \quad \text{for } n \in N \\ s'_x &= \alpha^T x, \quad s'_y = \alpha^T y \\ \alpha^T e &= 1, \quad \alpha \leq B_{.,s'} \\ \alpha &\in \mathbb{R}_+^{|N|}, \quad B_{n,s'} \in \{0, 1\}^{|N|} \end{aligned}$$

### 3.4. S' initialization

We initialize the set of potential charging stations  $S'$  with the station which would satisfy the maximum balanced flow, which is found by solving *Maximum Flow (MF)*.

$$\begin{aligned} \max \sum_{t \in T} \min(2B^T f^{t-}, 2B^T f^{t+}, m_{s'} v_t) &&& \text{(MF)} \\ \text{s.t. } d(s', n) &\leq w + (e - B)(d_n - w) \quad \text{for } n \in N \\ s'_x &= \alpha^T x, \quad s'_y = \alpha^T y \\ \alpha^T e &= 1, \quad \alpha \leq B \\ m_{s'} &\leq \alpha^T m^N + 0.5, \quad m_{s'} \in \mathbb{Z}_{++} \\ \alpha &\in \mathbb{R}_+^{|N|}, \quad B \in \{0, 1\}^{|N|} \end{aligned}$$

If  $m_{s'}^{\max} - m_{s'}^{\min} > 0$  there could be a trade-off between capacity and cost when determining the station's location. We minimize the station cost without restricting potential flow by solving (OA $\bar{c}$ ), where  $m_{s'}^{\bar{c}}$  is the maximum parking space capacity required as defined in Section 3.1, and then set  $m_{s'} = \lceil \alpha^T m^N \rceil$ . We call the station found from this process  $s^{MF}$ .

$$\begin{aligned} \min \alpha^T c^N &&& \text{(OA}\bar{c}\text{)} \\ \text{s.t. } s'_x &= \alpha^T x, \quad s'_y = \alpha^T y \\ \alpha^T e &= 1, \quad \alpha \leq B_{.,s'} \\ m_{s'}^{\bar{c}} &\leq \alpha^T m^N + 0.5 \\ \alpha &\in \mathbb{R}_+^{|N|} \end{aligned}$$

### 3.5. Balanced car sharing algorithm

We now present the BCSA algorithm for finding a balanced electric car sharing network.

---

#### Algorithm 2 Balanced charging station algorithm (BCSA)

---

- 1: Initialize  $S' = s^{MF}$  by solving (MF) and (OA $\bar{c}$ )
  - 2: Solve (MN)
  - 3: Solve (D)
  - 4: **while**  $\overline{MN} > 0$  **do**
  - 5:   Solve (NS)( $\overline{MN}$ )
  - 6:   **if**  $h_{s'} > 0$  **then**
  - 7:     Solve (OA)
  - 8:      $S' = S' \cup \{s'\}$
  - 9:     Solve (D)
  - 10:   **else**
  - 11:      $\overline{SB} = \overline{SB} - 1$
  - 12:   **end if**
  - 13: **end while**
  - 14: Solve (OP) with  $S = S'$
-

**Table 1**Summary of numerical results using BCSA, EE, and  $S = N$ .

	BCSA	EE	$S = N$
Objective value	6318	6342	46,231
% trips alloc	91.96	91.93	41.14
Comp time (min)	38.63	720	1.00
$ S $	85	1764	90
$ z > 0 $	39	41	38
Ave space cost	1.651	1.590	1.718
Budget used	64.40	65.20	65.27
% budget used	98.58	99.93	99.82

#### 4. Exhaustive enumeration (EE) method

Instead of iteratively finding stations, we consider finding all possible stations  $S$  initially and then solving (OP) directly. We again limited the search to a single station per subset of nodes. The basic means of finding  $S$  was as follows. For each node  $n$ , we found the set of nodes  $S_n = \{n' : d(n, n') \leq 2d, n' \neq n\}$ . We then found all subsets  $S'_n$  of size  $|S_n|, |S_n| - 1, \dots, 0$  in  $S_n$ . If for all  $n', n'' \in S'_n, d(n', n'') \leq 2w$ , we added a station  $s'$  with  $\mathcal{N}(s') = S'_n \cup \{n\}$  to  $S$ , if it had not already been added. The cost and capacity of  $s'$  were found using (OA<sup>c</sup>).

#### 5. Numerical experiment

##### 5.1. Traffic & GIS data

We test our methodology using trip data from the Transportation Tomorrow Survey [3,9] covering the Greater Golden Horseshoe area of Ontario, Canada. The city of Toronto comprises 16 planning districts. We focused on trips made by car in planning district 1 which contains downtown Toronto and the surrounding area. This dataset contains 90 traffic zones and 78,549 trips over a 24 h period, broken down into 5 time periods: 6:00-9:00, 9:00-15:00, 15:00-19:00, 19:00-24:00, and 24:00-6:00. ESRI shapefiles were used to determine node locations as the centroid of each traffic zone.

##### 5.2. Estimating $v_t$

The average trip lengths over each time period are  $l = [2.728, 2.467, 2.661, 2.817, 2.615]$ , and the average required time to park or leave a charging station,  $p$ , was chosen as 10 min. We calculated  $u$  based on information acquired about the bluecar used by Autolib' in Paris, which can travel up to 250 km with a recharge time of approximately 4 h [11]. The capacity of a pair of parking spaces was then estimated as  $v = [6366, 12874, 8512, 10570, 12794]$  over the 5 time periods, which have been rounded down to the nearest even integer.


##### 5.3. Parking spaces, station cost, and budget

The cost of installing a pair of parking spaces and the number of pairs of parking spaces were set to vary between [1, 2] and [1, 3], respectively. We took the centroid of all nodes within our dataset and considered this point  $P$  to be the most expensive and dense part of the city area. A node's distance from  $P$  determined its cost and parking space capacity, with the closest node having a cost of 3 and the furthest having a cost of 1, with prices descending linearly with distance. All nodes within  $\frac{1}{3}$  of the largest distance from the set of nodes to  $P$  had a capacity of 1 pair, between  $(\frac{1}{3}, \frac{2}{3})$  had a capacity of 2 pairs and the remaining nodes had a capacity of 3 pairs. We set our budget  $b = 0.3(c^N)^T m^N = 65.32$ . The average cost of a pair of parking spaces was 1.666. This allowed for up to 39 average cost pairs of parking spaces to be used.

##### 5.4. Experiment results

All experiments were done on a Windows 10 Pro 64-bit, Intel Core i7-7820HQ 2.9 GHz processor with 8 GB of RAM computer using Gurobi 8.01. An initial attempt at solving EE to optimality was abandoned after two days, after which a time limit was set for 12 h. Table 1 presents a summary of results using BCSA (Algorithm 2), EE (Section 4), and solving (OP) with  $S = N$ . Objective value is the total number of trips not satisfied. % trips alloc is the percentage of the total trips allocated to a station. Comp time (min) is the total computation time in minutes.  $|S|$  is the number of potential stations found or considered.  $|z > 0|$  is the total number of stations built. Ave space cost is the average cost of a pair of parking spaces built. Budget used is the total amount spent on the electric car network, with % budget used being the percentage of the budget  $b$  spent. We observe that BCSA outperformed EE in terms of both computation time and solution quality. Using either solution method, we see that adding the ability of sharing stations between nodes greatly decreases the number of balanced rides not satisfied, with both methods having less than 14% of the number of unallocated rides as with  $S = N$ . We also observe that BCSA was able to use money more efficiently, having spent the least amount out of all methods. Table 2 provides a per time period summary of the number of total trips and the number of trips satisfied for each method. The set of nodes and stations are plotted in Fig. 1, where each station was plotted at the centroid of its neighbouring nodes. This figure illustrates another benefit of sharing stations between nodes in that given the



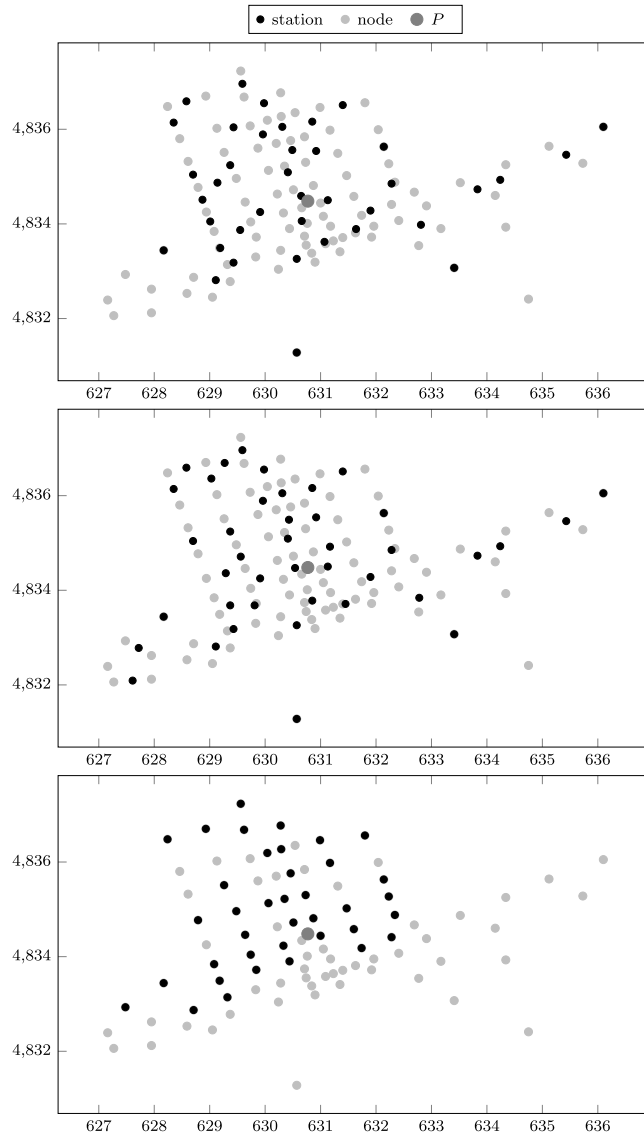

**Fig. 1.** Traffic nodes and station locations for BCSA (top), EE (middle), and  $S = N$  (bottom).

**Table 2**

Number of trips satisfied per time period using BCSA, EE, and  $S = N$ .

Time period	1	2	3	4	5	Sum
Total trips	12,724	21,762	25,194	18,495	374	78,549
BCSA	10,269	21,107	23,592	17,153	110	72,231
EE	10,147	21,289	23,445	17,221	105	72,207
$S = N$	4332	9811	10,747	7428	0	32,318

same budget, and using approximately the same number of stations, BCSA and EE were able to satisfy trips from a much greater geographical area, including areas of the extreme periphery. The choice of station locations for the  $S = N$  model is restricted almost exclusively to where the nodes are the densest, whereas both BCSA and EE have stations, for example, east of  $x = 632.5$  and south of  $y = 4832.5$ .

## 6. Conclusion and future research

Vehicle relocation is an operational burden for one-way electric car sharing networks. We have developed a novel approach to minimize its requirement by optimizing the location of charging stations so as to maximize the balanced

flow in the network. By doing this, the trips we expect to satisfy do not depend on vehicle relocation, as the network self-regulates over time. Though we were interested in creating a self-regulating car sharing network without the need for vehicle relocation, there is nothing preventing the use of both methods to further increase the number of trips satisfied. Future research could involve a two-stage stochastic optimization model, where charging stations are optimized, and then given a stochastic daily network usage, the number of required employees and their deployment is determined to relocate vehicles so as to maximize the expected number of trips satisfied. It would also be interesting to simulate our model's real-time performance using an agent-based model to get more insight into how it would work in practice, and to potentially discover new insights to improve our model's assumptions. Finally, we also see our methodology being useful in other one-way sharing programs, such as for bicycles, which suffer from the same network imbalance problem.

**Acknowledgements**

The authors thank the anonymous referees for their valuable comments. This work was supported by Natural Sciences and Engineering Research Council of Canada Discovery Grant programs (RGPIN-2015-06164, RGPIN6524-15). The authors would like to thank Mark Ferguson and Sean Spears of the McMaster Institute for Transportation & Logistics for their assistance in obtaining the OD trip and GIS location data for the numerical experiment.

**Appendix**

*A.1. Requirement of (OP.5) in (OP) for trip integrity*

Consider the single period problem of there being two nodes,  $n_1$  and  $n_2$ , and three stations  $s_1, s_2$ , and  $s_3$ . The capacity of each station is 10 (e.g.  $v_1 = 10, m_{s_i} = 1$  for all  $i$ , and  $b = \infty$ ). Let

$$OD^1 = \begin{bmatrix} 0 & 10 \\ 10 & 0 \end{bmatrix}$$

and assume  $\mathcal{N}(n_1) = \{s_1\}$  and  $\mathcal{N}(n_2) = \{s_2, s_3\}$ . We see in total there are 20 trips, 10 going from  $n_1$  to  $n_2$ , and 10 going from  $n_2$  to  $n_1$ . As  $n_2$  has access to two stations, all of its incoming and outgoing flow can be accommodated, 5 inflow and 5 outflow going to each, whereas  $n_1$  has access only to one station, and so can only assign 5 inflow and 5 outflow. The optimal solution is 10, with

$$E^1 = \begin{bmatrix} 0 & 5 \\ 5 & 0 \end{bmatrix}$$

If we consider now the case where constraint (OP.5) of (OP) is omitted, the optimal solution is 5, with

$$E^1 = \begin{bmatrix} 5 & 0 \\ 0 & 0 \end{bmatrix}$$

Placing 5 in cell (1,1) accounts for the 5 inflow and 5 outflow not assigned by  $n_1$ , while not influencing the flow allocation of  $n_2$ , allowing it to allocate all of its flow to its neighbouring stations, while in reality 5 of  $n_1$ 's outgoing trips were never assigned to a charging station's outward flow.

*A.2. An example of  $AX^t \{ \leq, = \} b^t$*

We write  $AX^t \{ \leq, = \} b^t$  for the example problem described in Appendix A.1. The curly bracketed numbers in the first column indicate the constraint set each row is from.

(OP.1')	1	0	0	0	0	0	0	0	0	0	$F_{1,1}^+$	$\leq$	5
(OP.1')	0	1	0	0	0	0	0	0	0	0	$F_{2,2}^+$	$\leq$	5
(OP.1')	0	0	1	0	0	0	0	0	0	0	$F_{3,2}^+$	$\leq$	5
(OP.2)	1	0	0	0	0	0	1	1	0	0	$F_{1,1}^-$	$=$	10
(OP.2)	0	1	1	0	0	0	0	0	1	1	$F_{2,2}^-$	$=$	10
(OP.3)	0	0	0	1	0	0	1	0	1	0	$F_{3,2}^-$	$=$	10
(OP.3)	0	0	0	0	1	1	0	1	0	1	$E_{1,1}$	$=$	0
(OP.4)	1	0	0	-1	0	0	0	0	0	0	$E_{2,1}$	$=$	0
(OP.4)	0	1	0	0	-1	0	0	0	0	0	$E_{1,2}$	$=$	0
(OP.4)	0	0	1	0	0	-1	0	0	0	0	$E_{2,2}$	$=$	0
(OP.5)	0	0	0	0	0	0	1	0	0	0		$\leq$	10
(OP.5)	0	0	0	0	0	0	0	1	0	0		$\leq$	10
(OP.5)	0	0	0	0	0	0	0	0	1	0		$\leq$	10
(OP.5)	0	0	0	0	0	0	0	0	0	1		$\leq$	0

## References

- [1] Autolib', <http://autolib.eu>. (Accessed 19 January 2018).
- [2] A. Ait-Ouahmed, D. Josselin, F. Zhou, Relocation optimization of electric cars in one-way car-sharing systems: modeling, exact solving and heuristics algorithms, *Int. J. Geogr. Inf. Sci.* 32 (2) (2018) 367–398.
- [3] B. Ashby, TTS 2016 data guide, 2018, [http://dmg.utoronto.ca/pdf/tts/2016/2016TTS\\_DataGuide.pdf](http://dmg.utoronto.ca/pdf/tts/2016/2016TTS_DataGuide.pdf), (Accessed 29 July 2018).
- [4] B. Boyaci, K.G. Zografos, N. Geroliminis, An integrated optimization-simulation framework for vehicle and personnel relocations of electric carsharing systems with reservations, *Transp. Res. B* 95 (2017) 214–237.
- [5] G. Brandstätter, M. Kahr, M. Leitner, Determining optimal locations for charging stations of electric car-sharing systems under stochastic demand, *Transp. Res. B* 104 (2017) 17–35.
- [6] M. Bruglieri, A. Colomi, A. Luè, The vehicle relocation problem for the one-way electric vehicle sharing: an application to the Milan case, *Proc.-Soc. Behav. Sci.* 111 (2014) 18–27.
- [7] M. Dror, D. Fortin, C. Roucairol, Redistribution of Self-service Electric Cars: A Case of Pickup and Delivery, Research Report RR-3543, INRIA, 1998.
- [8] I. Frade, A. Ribeiro, G. Gonçalves, A.P. Antunes, Optimal location of charging stations for electric vehicles in a neighborhood in lisbon, Portugal, *Transp. Res. Rec.* 2252 (1) (2011) 91–98.
- [9] A. Rose, Design and conduct of the survey, 2018, [http://dmg.utoronto.ca/pdf/tts/2016/2016TTS\\_Conduct.pdf](http://dmg.utoronto.ca/pdf/tts/2016/2016TTS_Conduct.pdf), (Accessed 29 July 2018).
- [10] A. Schrijver, *Theory of Linear and Integer Programming*, John Wiley & Sons, 1998.
- [11] Syndicat Mixte Autolib', autolib': une réalité!, 2010, [https://web.archive.org/web/20111014114207/http://autolib-paris.fr/IMG/pdf/Dossier\\_de\\_presse\\_16\\_12\\_2010.pdf](https://web.archive.org/web/20111014114207/http://autolib-paris.fr/IMG/pdf/Dossier_de_presse_16_12_2010.pdf), (Accessed 12 July 2018).