
Earliest-Start-Time-First Demo

Ryszard Janicki

Department of Computing and Software, McMaster University, Hamilton, Ontario, Canada

Consider lectures in order of start time:


- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.

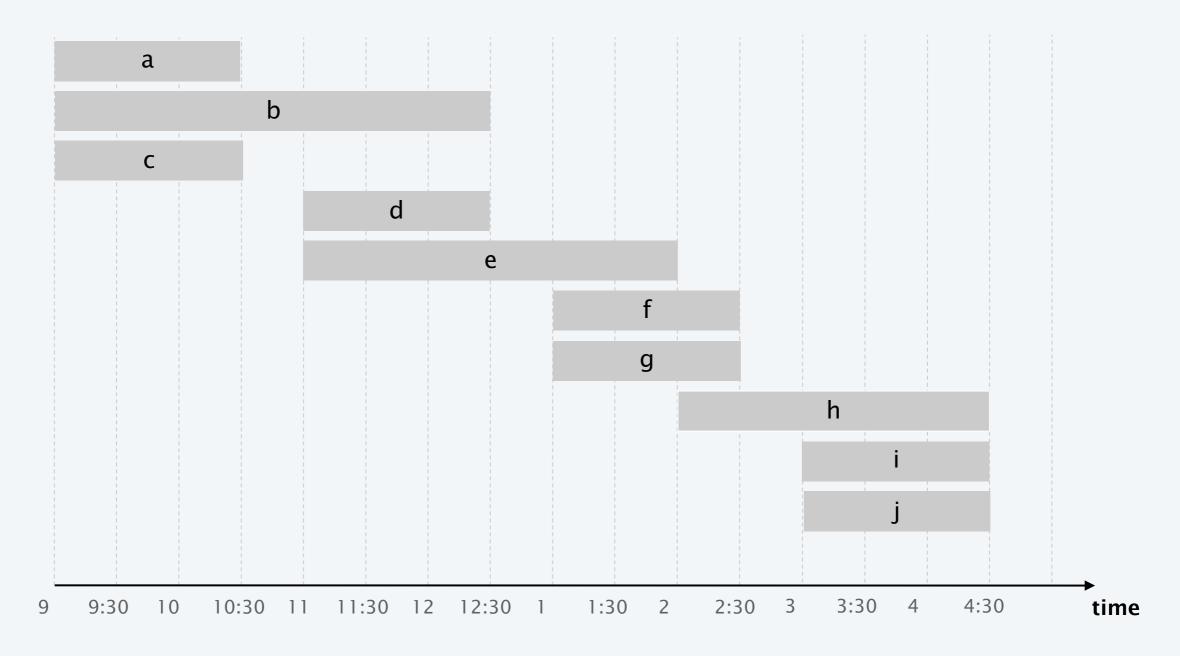

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.


no available classroom: open up a new classroom and assign lecture to it

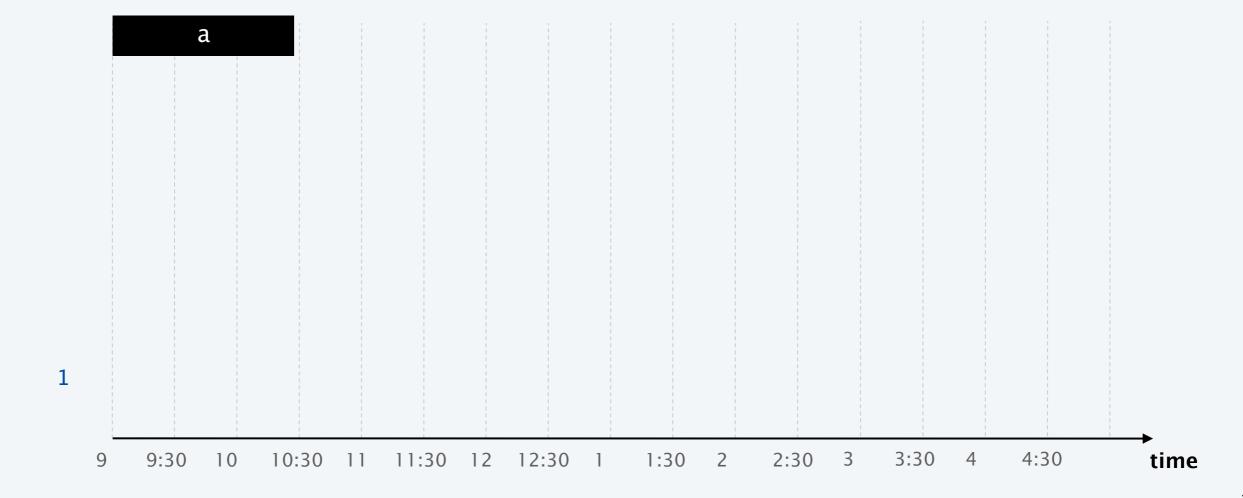

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.


no available classroom: open up a new classroom and assign lecture to it

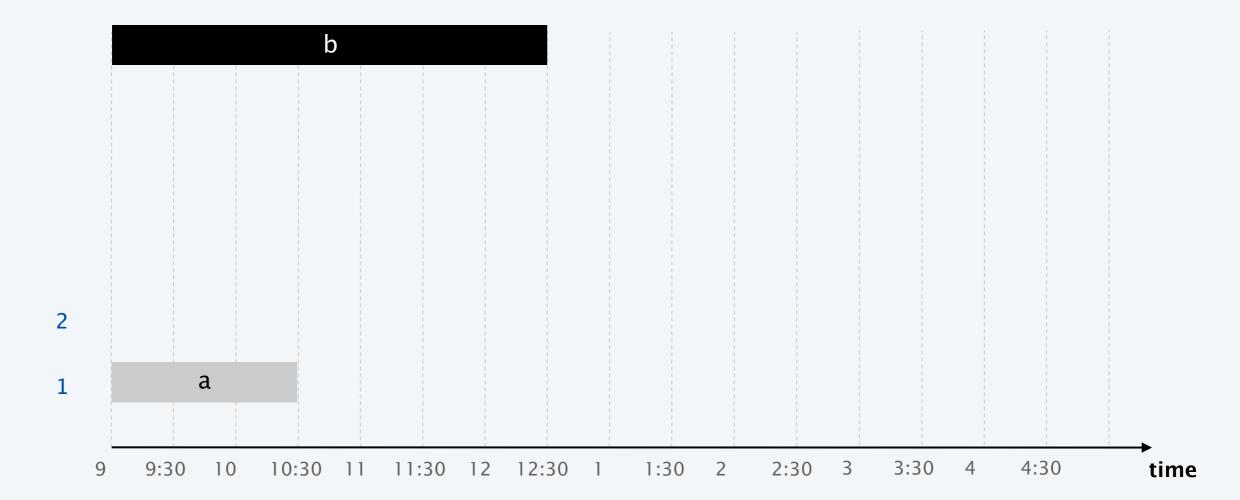

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.


no available classroom: open up a new classroom and assign lecture to it

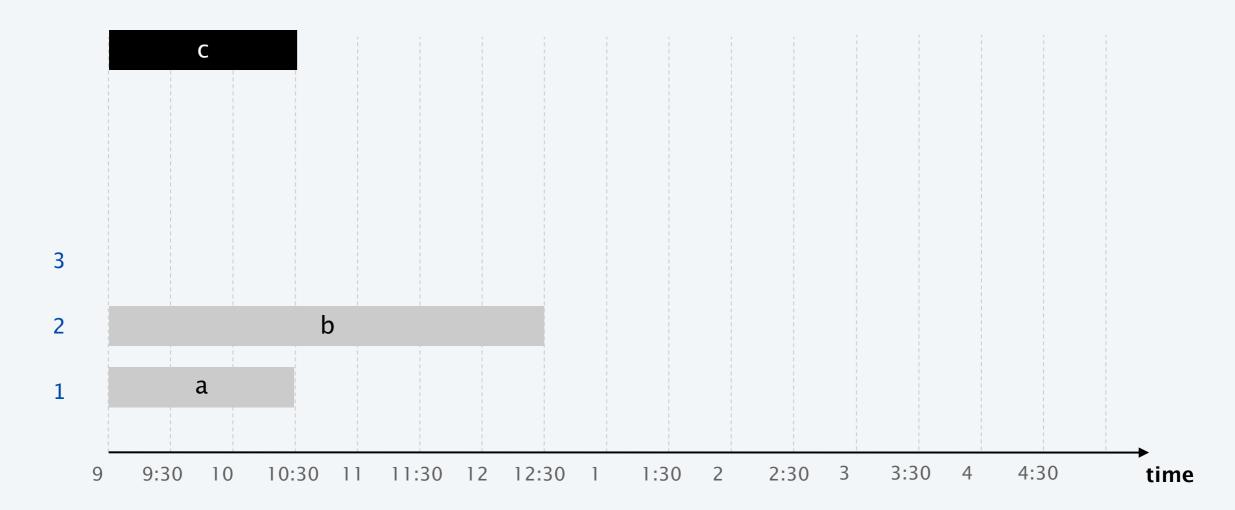

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.


lecture d is compatible with classrooms 1 and 3

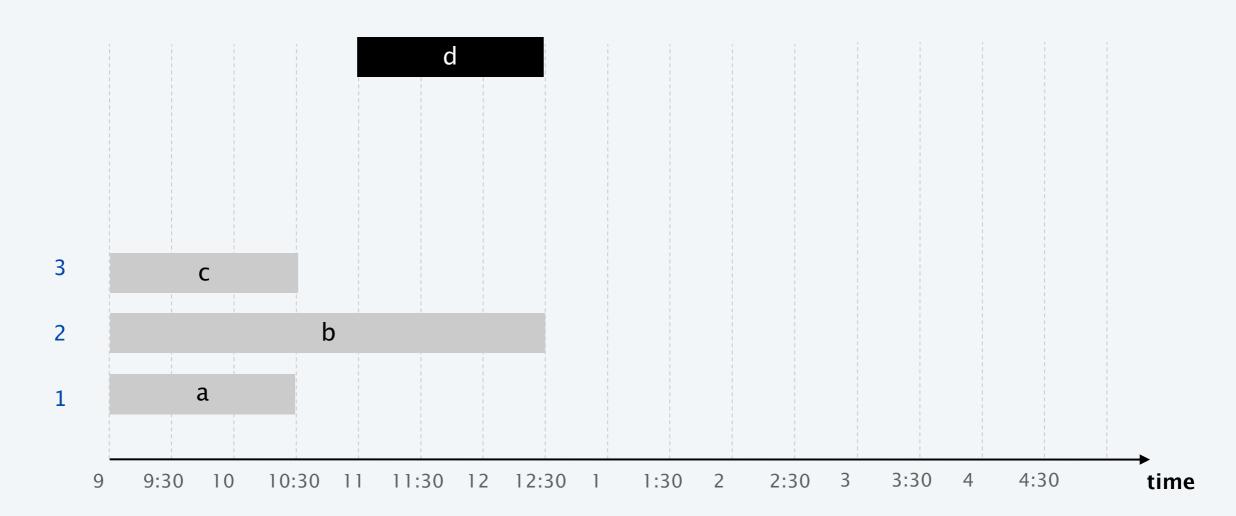

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.


lecture e is compatible with classroom 1

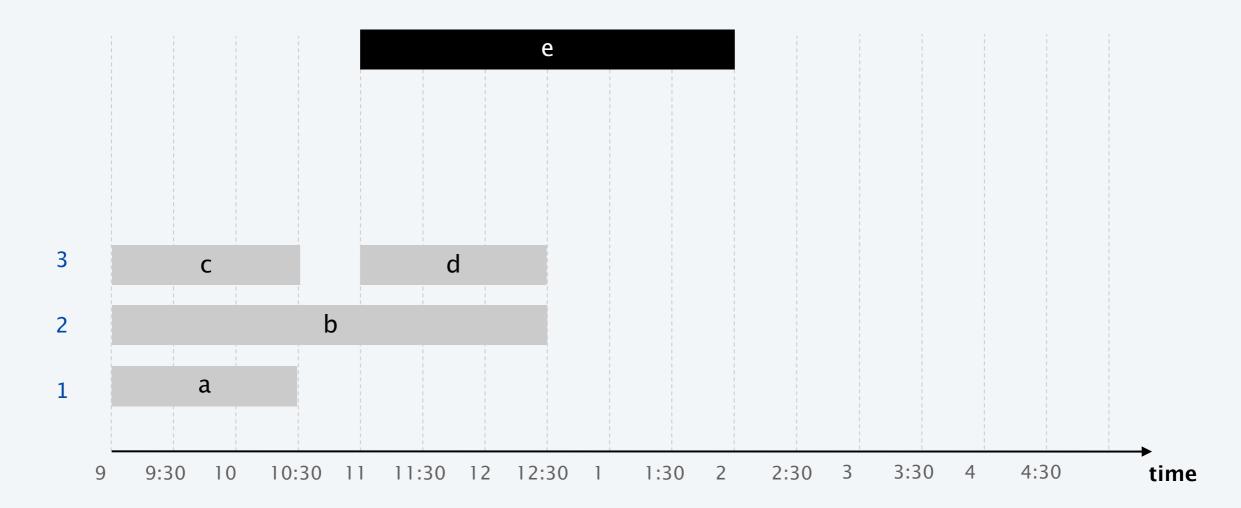

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.


lecture f is compatible with classroom 2 and 3

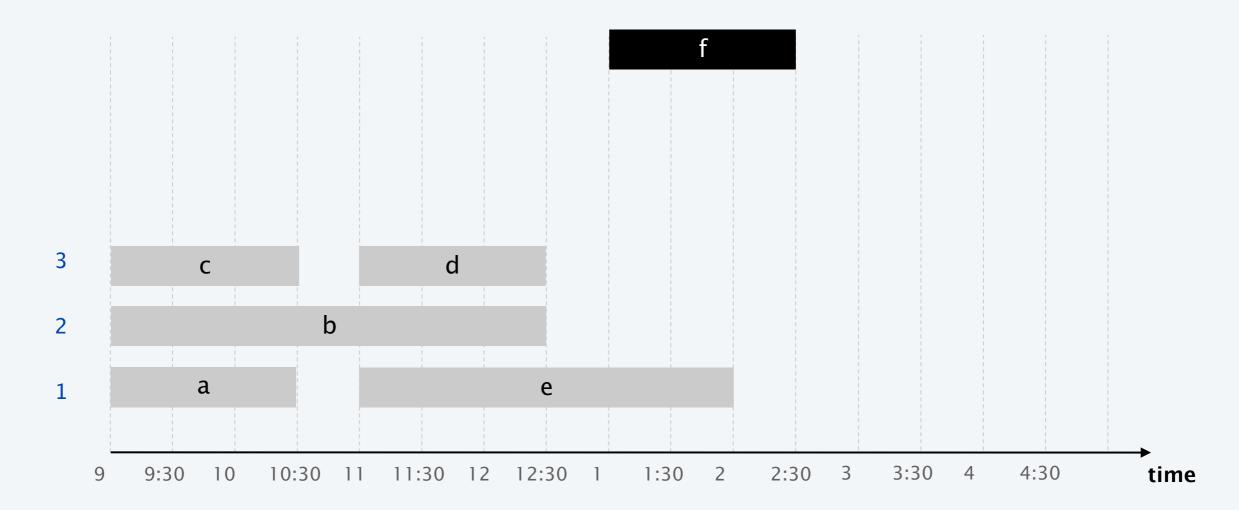

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.


lecture g is compatible with classroom 2

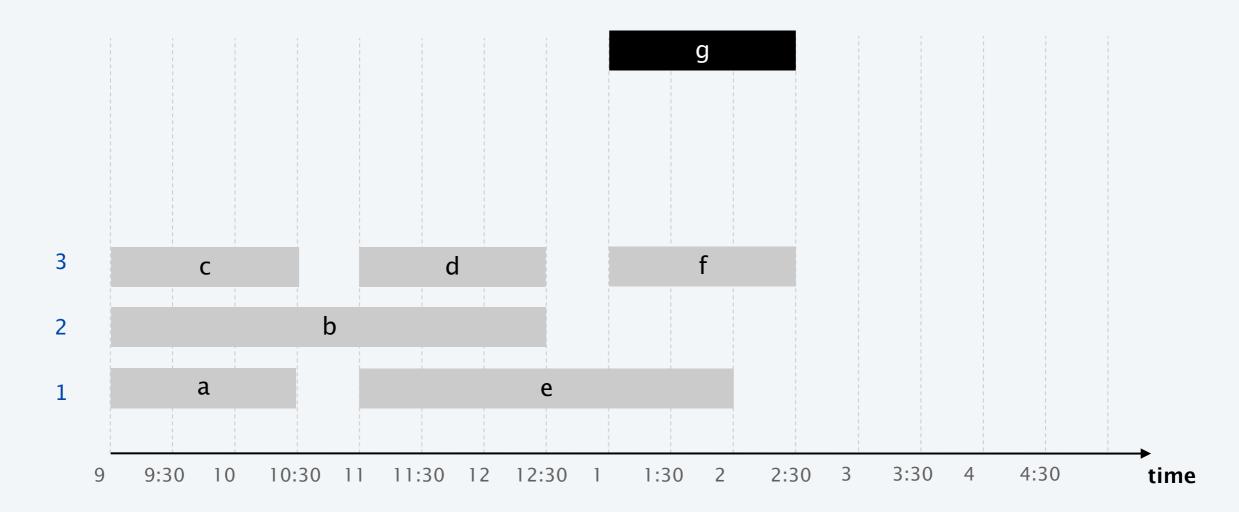

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.


lecture h is compatible with classroom 3

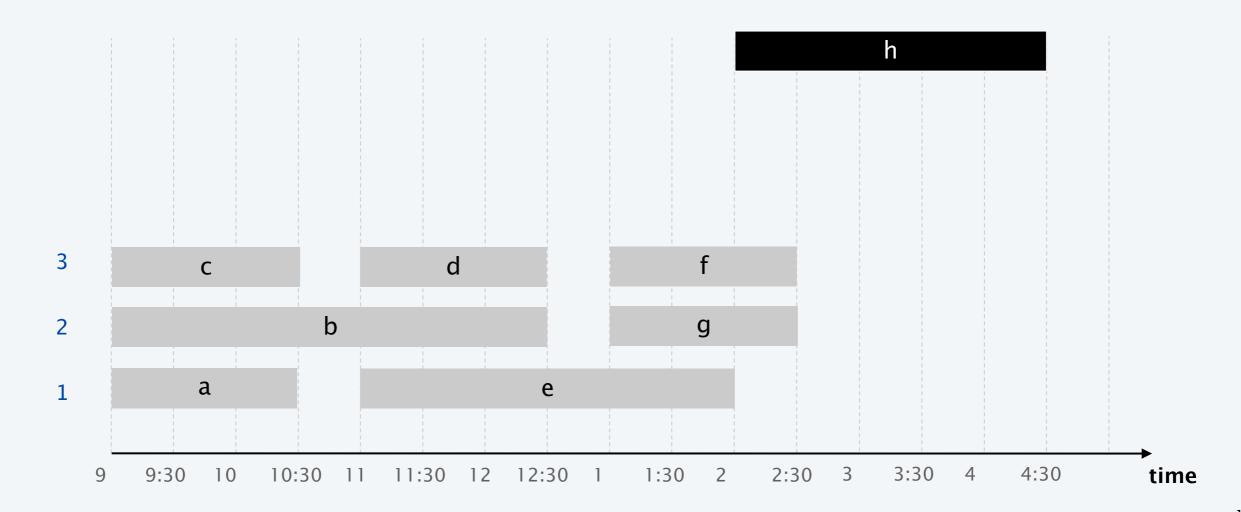

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.


lecture j is compatible with classrooms 2 and 3

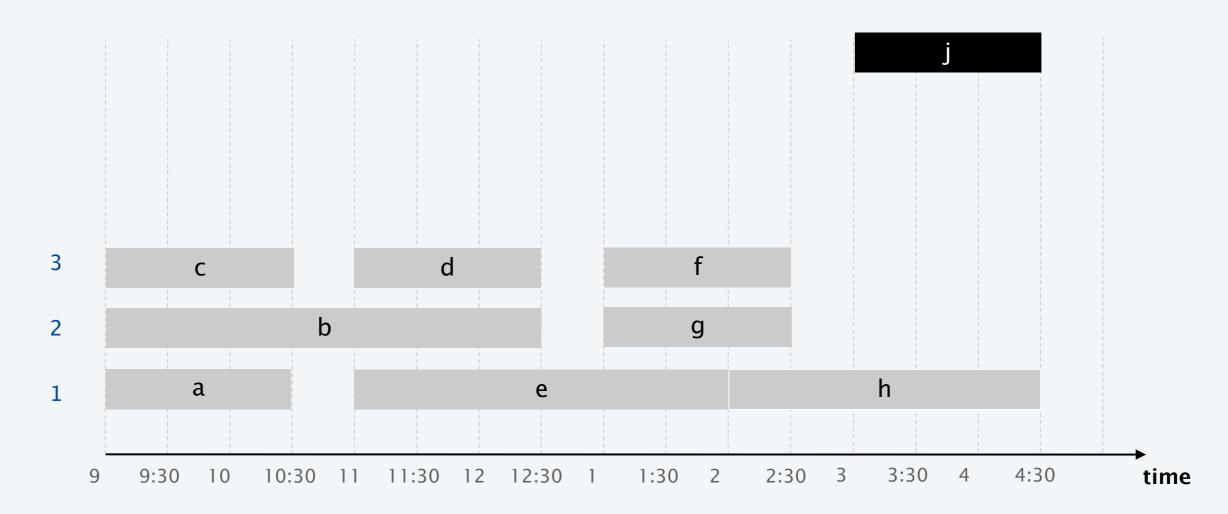

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.

lecture i is compatible with classroom 2

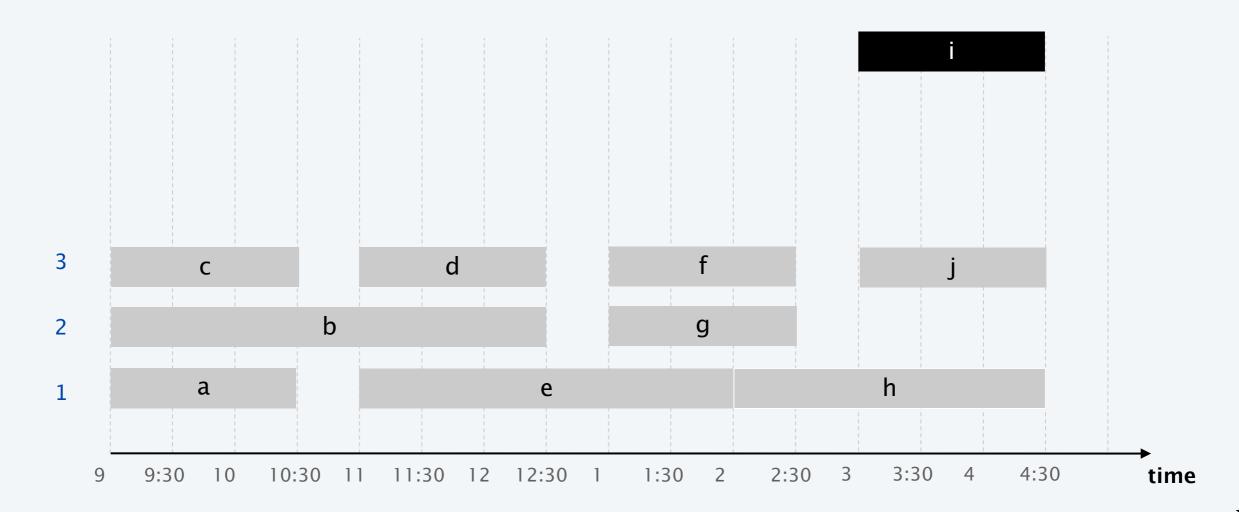

Consider lectures in order of start time:

- Assign next lecture to any available classroom (if one exists).
- Otherwise, open up a new classroom.

done

